

## CD080-MEC mechanical devices - Measurement range 0 up to 2500 mm

### Specifications:


<b>Measurement range</b>	<b>0 up to 2500 mm</b>
<b>Circumference drum</b>	<b>200 mm/turn 204,8 mm/turn</b>
<b>Sensing device</b>	<b>Adaptable with all our incremental or absolute encoders</b>
<b>Material</b>	<b>Body and cover - aluminium (RoHS) Measuring cable – Stainless steel</b>
<b>Cable diameter</b>	<b>0,60 mm</b>
<b>Standard linearity</b>	<b>+/- 0,05% f.s. +/- 0,01% f.s. (optional)</b>
<b>Max. Velocity</b>	<b>10 m/s</b>
<b>Max. Acceleration</b>	<b>8 m/s<sup>2</sup> (before cable deformation)</b>
<b>Weight</b>	<b>≈ 1500 g</b>
<b>Operating temperature</b>	<b>-20° to +80°C</b>
<b>Storage temperature</b>	<b>-30° to +80°C</b>



### Cable forces:

Measurement range in mm	Min. pull-out force	Max. pull-out force
2500	≈ 7,50 N	≈ 11,00 N

### Ordering reference:

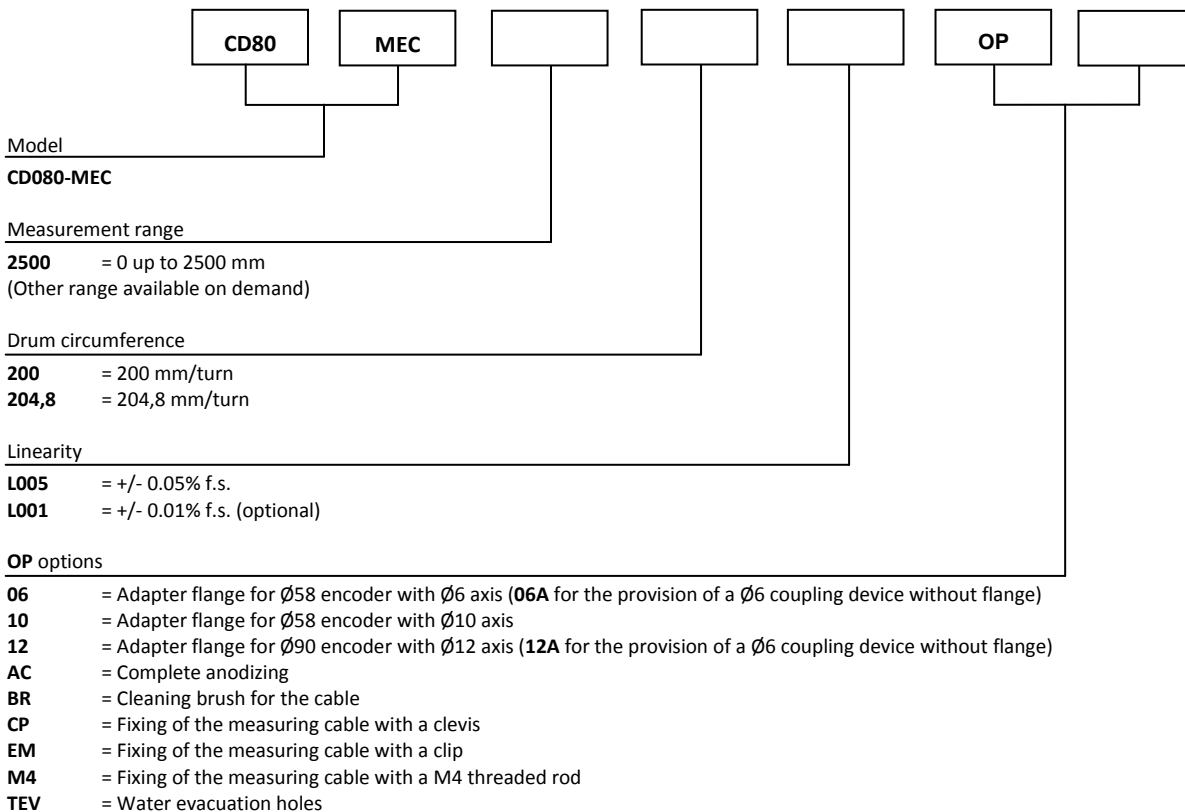

If no option is specified for the adapter flange, the draw-wire sensor will be supplied as standard with a Ø10 coupling brace without a flange. For the adaptation of an encoder or other sensor device which does not belong to our range, please contact us.

Reference example: CD080-MEC-2500-200-L05-OP-10-AC

Made in France

### CD080-MEC mechanical devices - Measurement range 0 up to 2500 mm CE

Dimensions:

